



ALUMINUM


Single-point load cell




SPECIFICATIONS

Rated Capacity:	100 to 750kg
Full scale Output:	$2 \pm 0.2\text{mV/V}$
Zero Balance:	$\pm 0.1\text{m V/V}$
Accuracy Class:	C3, C3MR, C5 OIML approval Class III, 4500, Single or Multiple cells
Hysteresis Error:	$< \pm 0.0166\% \text{ F.S (C3, C3MR)}$ $< \pm 0.0083\% \text{ F.S (C5)}$
Non-linearity:	$< \pm 0.0166\% \text{ F.S (C3, C3MR)}$ $< \pm 0.0083\% \text{ F.S (C5)}$
Input Resistance:	$404\Omega \pm 15\Omega$
Output Resistance:	$350\Omega \pm 3\Omega$
Recommended Excitation:	10V (15V Maximum)
Insulation Resistance:	$> 2000\text{M}\Omega$ (50V DC)
Temperature Effect on Zero Balance:	$< \pm 0.0028\% \text{ F.S/}^\circ\text{C (C3)}$ $< \pm 0.0014\% \text{ F.S/}^\circ\text{C (C3MR, C5, C6)}$
Temperature Effect on Sensitivity:	$< \pm 0.00175\% \text{ F.S/}^\circ\text{C (C3, C3MR)}$ $< \pm 0.00087\% \text{ F.S/}^\circ\text{C (C5, C6)}$
Compensated Temperature Range:	-10 to 40°C
Operating Temperature Range:	-10 to 50°C
Storage Temperature Range:	-25 to 70°C
Safe Overload:	150% of full scale
Ultimate Overload:	300% of full scale
IP class:	Ip65
Cable length:	2m

Outline dimensions (in millimeters)

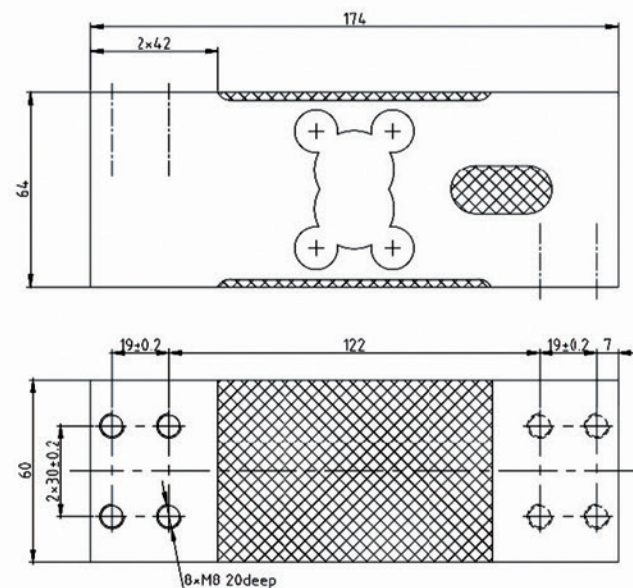

Wiring Schematic Diagram

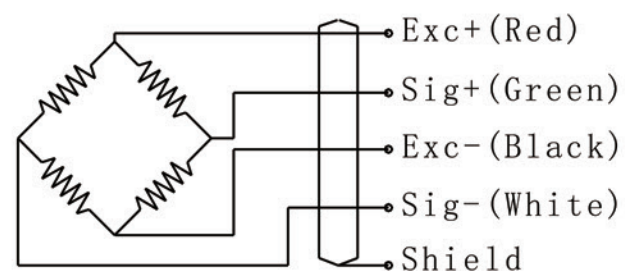

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
HBM	PW24C
Vishay TedeA-Huntleigh	1263
Zemic	L6G
Keli sensing	UDA